

CRP2

Panasonic

## LITHIUM MANGANESE DIOXIDE



## Features &amp; Benefits


- Operating temperature range between  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

## Specifications


Nominal Capacity:	1400 mAh
Nominal Voltage:	6V
Weight:	Approximately 37g
Operating Temperature:	$-40^{\circ}\text{C}$ - $+70^{\circ}\text{C}$ *

\*Please consult Panasonic for use below and above  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$

## Dimensions

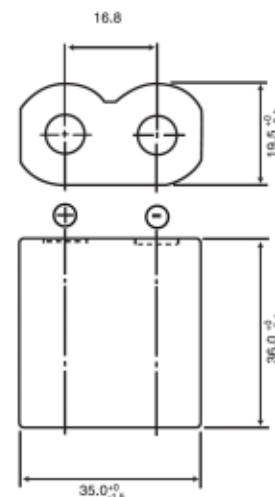

## Temperature Characteristics

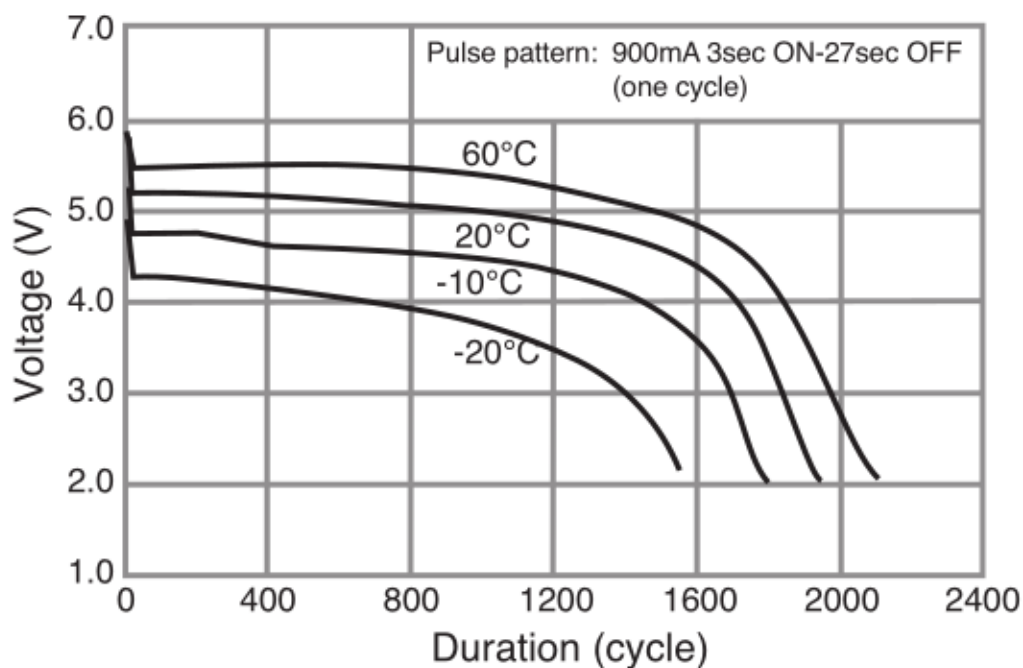

\*Please consult Panasonic for use below and above  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$